

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

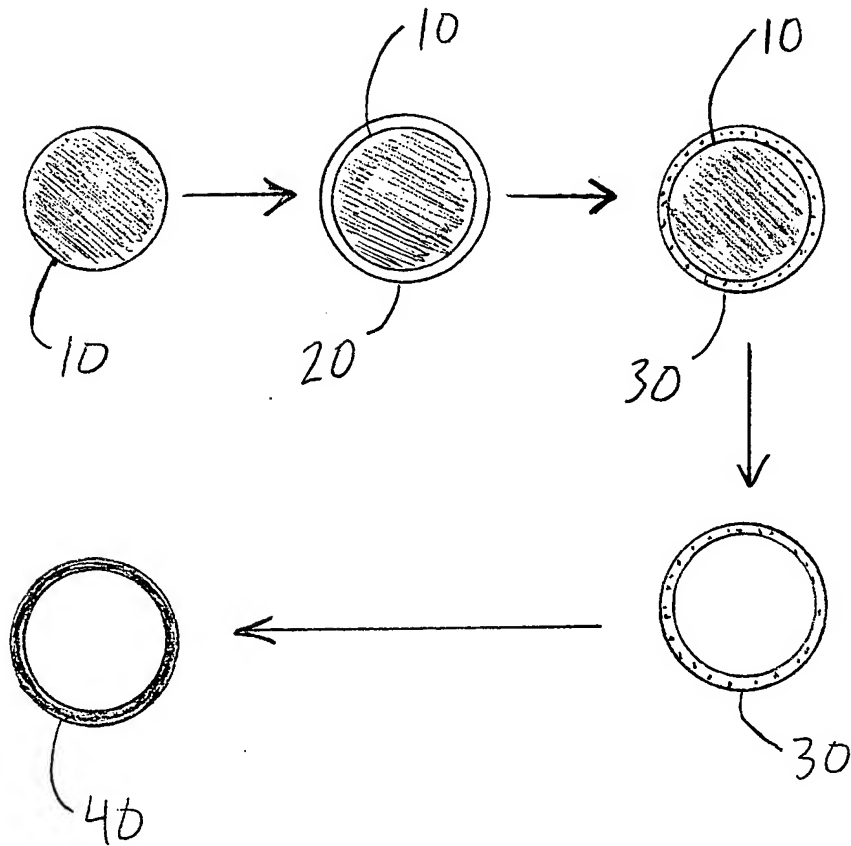


Fig. 1

Fig. 2

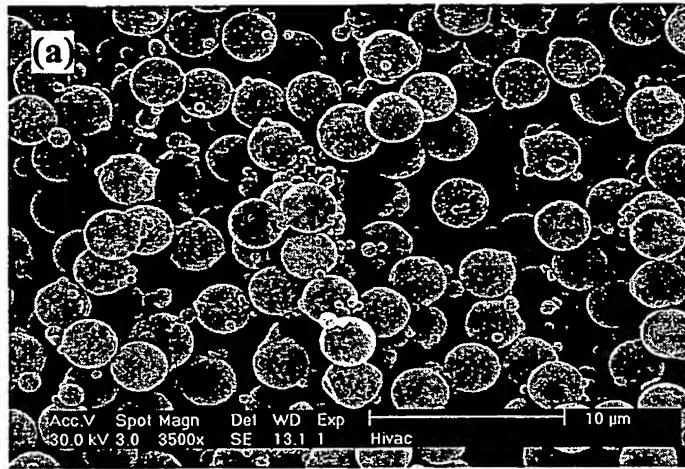


Fig. 3

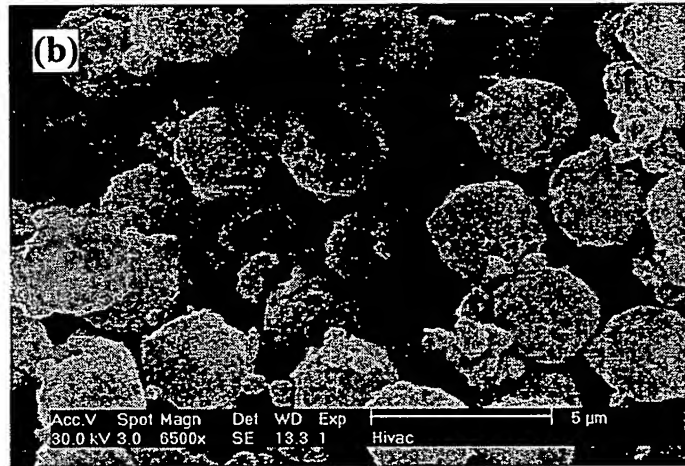


Fig. 4

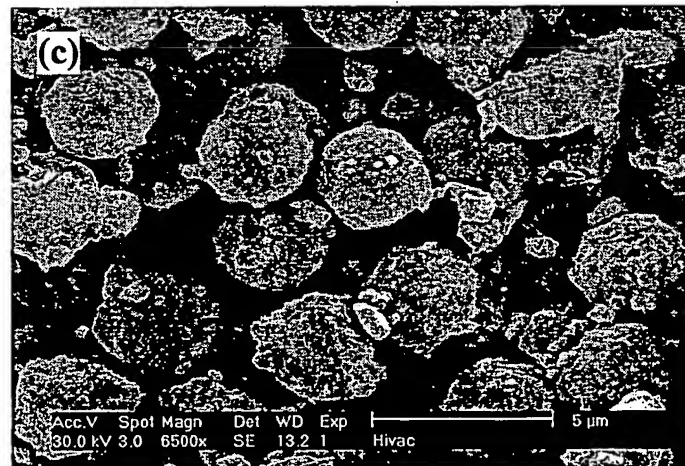


Fig. 5


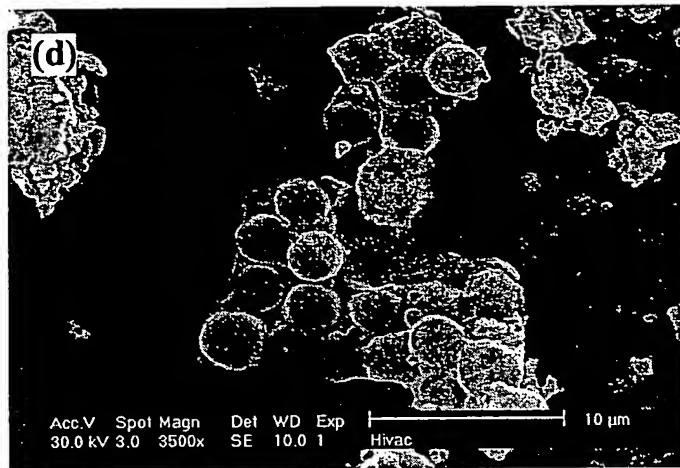


Fig. 6

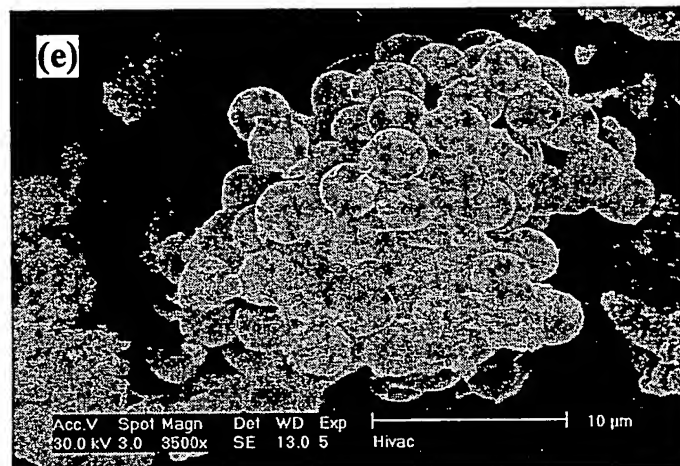

Sequence	Surface Area (m ² .g ⁻¹)	Pore Volume (mL.g ⁻¹)
untreated PS beads	1.47	0.01
alumoxane coated PS beads	182	0.22
A-alumoxane ^a after calcining to 220 °C	216	0.26
A-alumoxane calcined to 220 °C ^a after washing with toluene	146	0.25
after sintering to 1000 °C	142	0.55
A-alumoxane fired 1000 °C ^a	111	0.32

^a Free-standing samples formed by evaporation of an aqueous solution of A-alumoxane onto a flat substrate. Used for comparative purposes.

Fig. 7

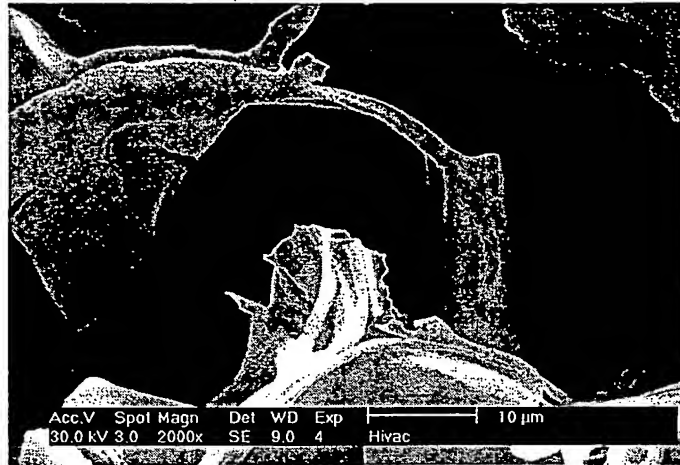


Fig. 8

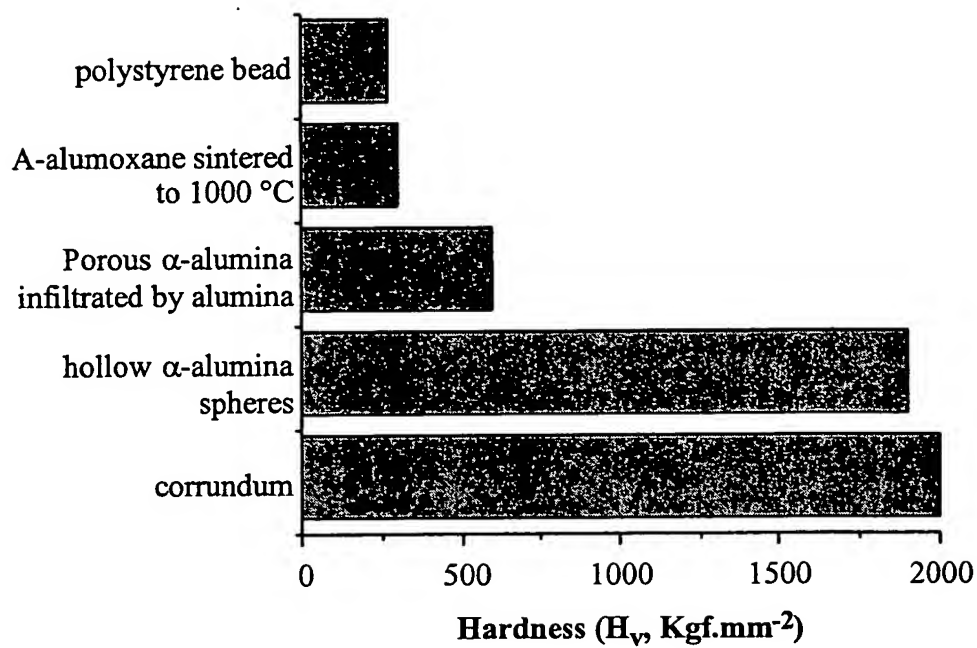


Fig. 9

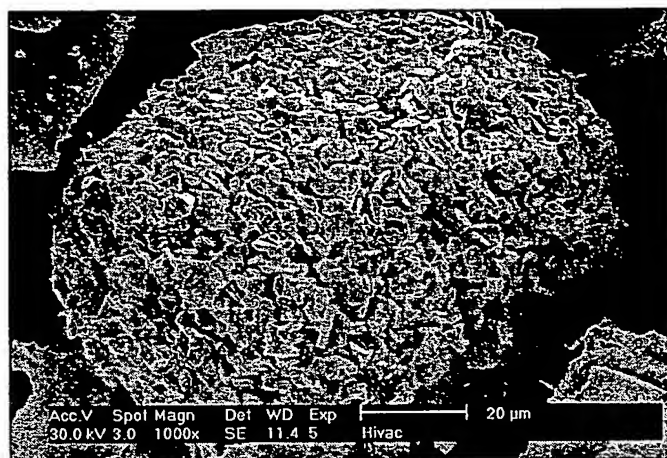


Fig. 10

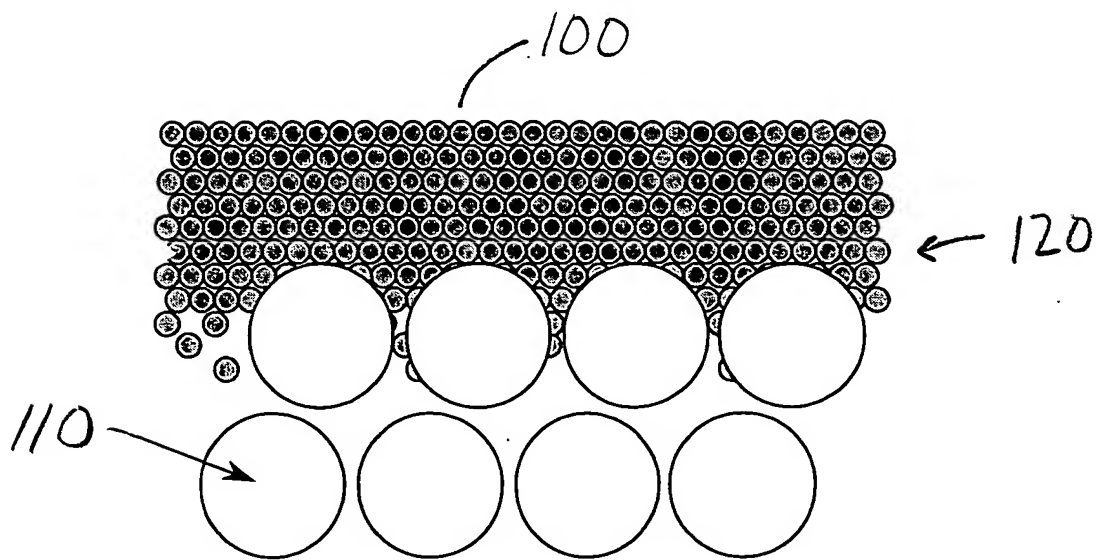


Fig. 11

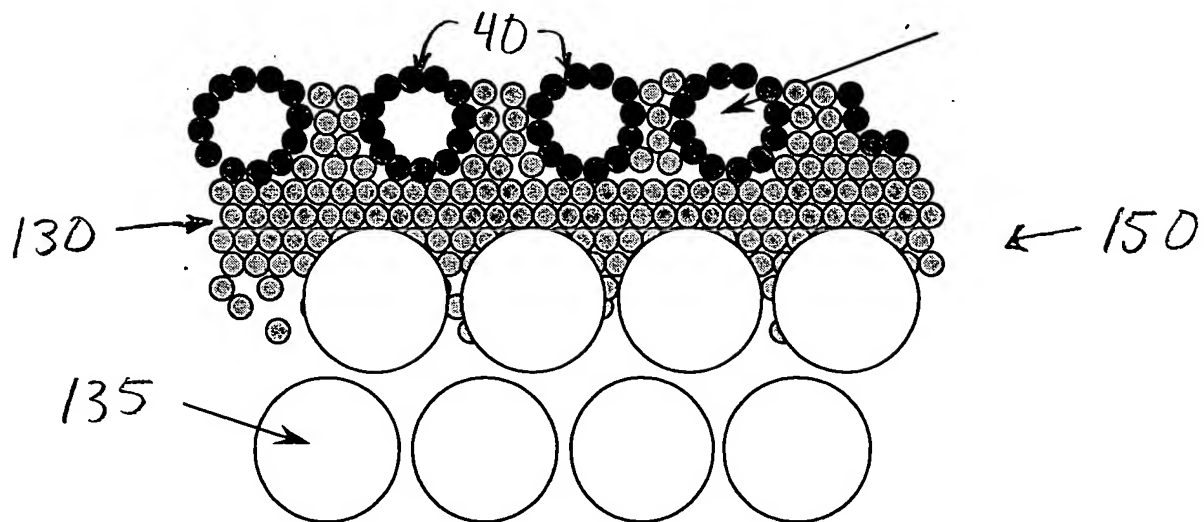


Fig. 12

	Alumina support	“Flat” alumina membrane	Membrane containing pre-formed α -alumina spheres		
wt% A-alumoxane used for spheres	n/a	n/a	2	5	8
Flow (mL.min ⁻¹)	0.12	0.71	0.108	0.065	0.06
Flux (10 ⁻⁶ m.s ⁻¹)	1.44	0.86	1.3	0.78	0.73
Permeability (nm ²)	37.0	22.1	33.7	20.4	18.7
Pore volume (mL.g ⁻¹)		0.32	0.47	0.48	0.50
Surface area (m ² .g ⁻¹)	3.5	111.0	245.5	224.8	254.24

Fig. 13

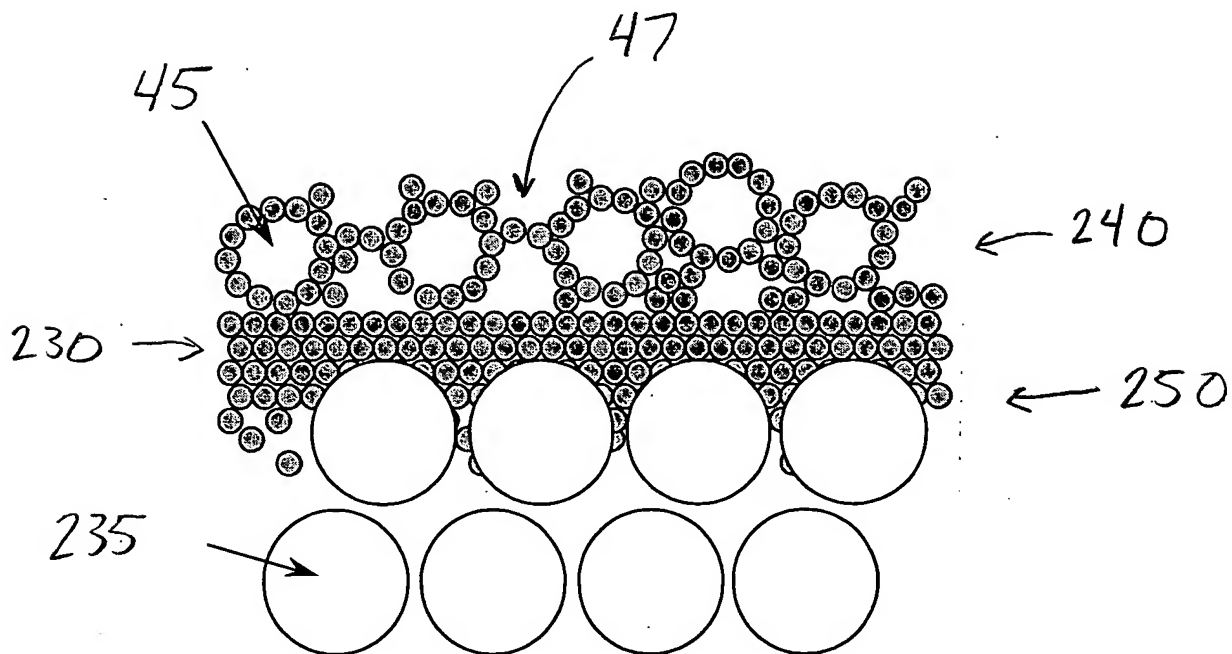


Fig. 14

Fig. 15

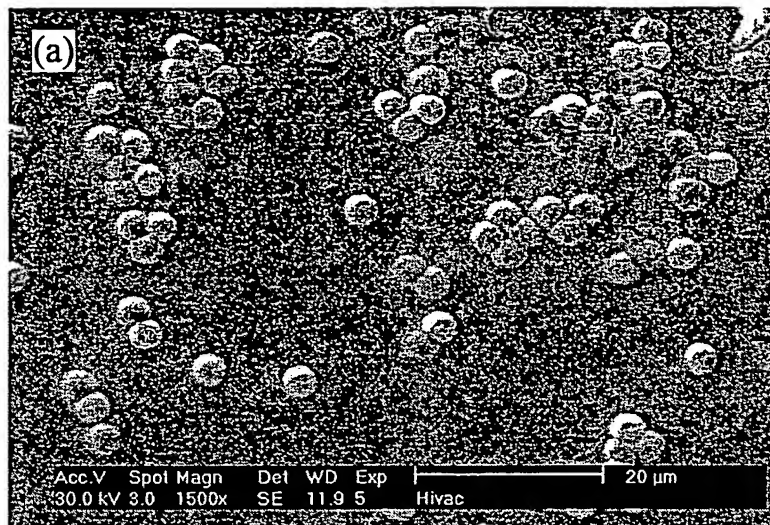
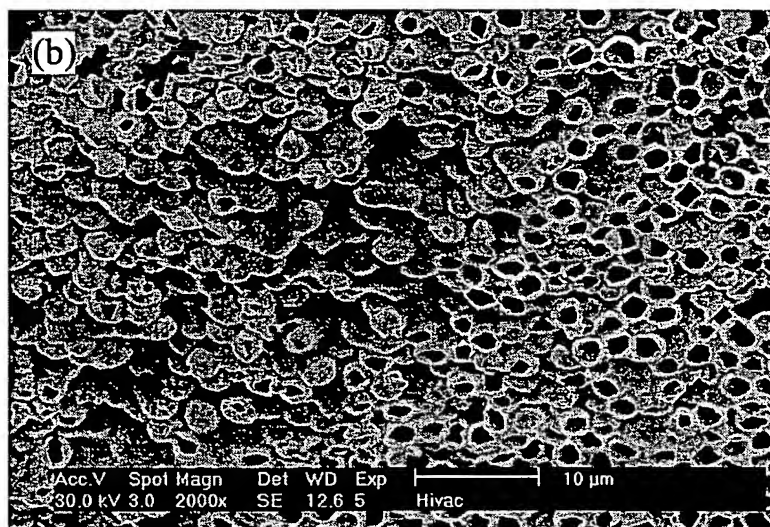


Fig. 16



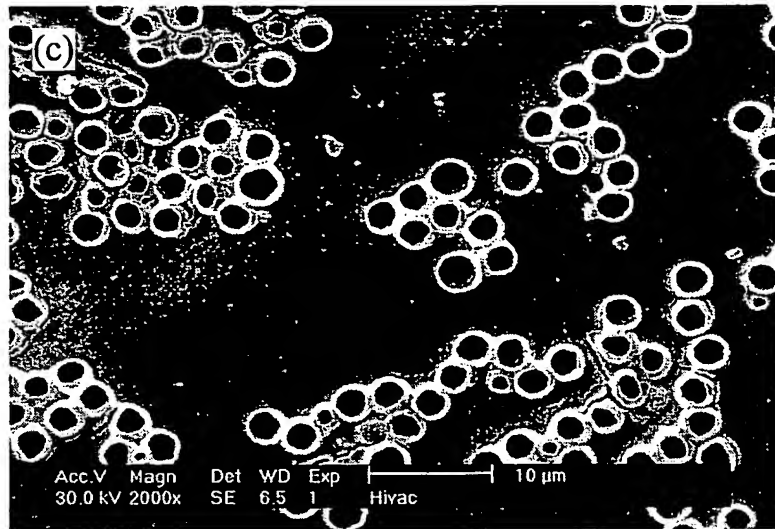


Fig. 17

Fig. 18


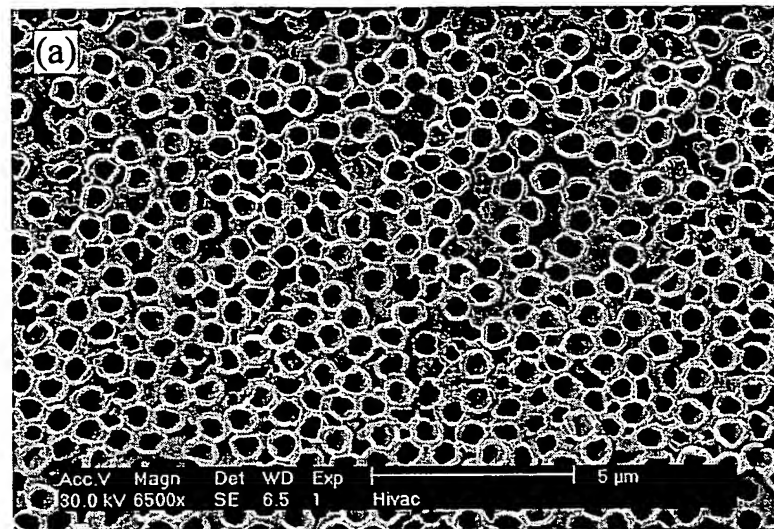


Fig. 19

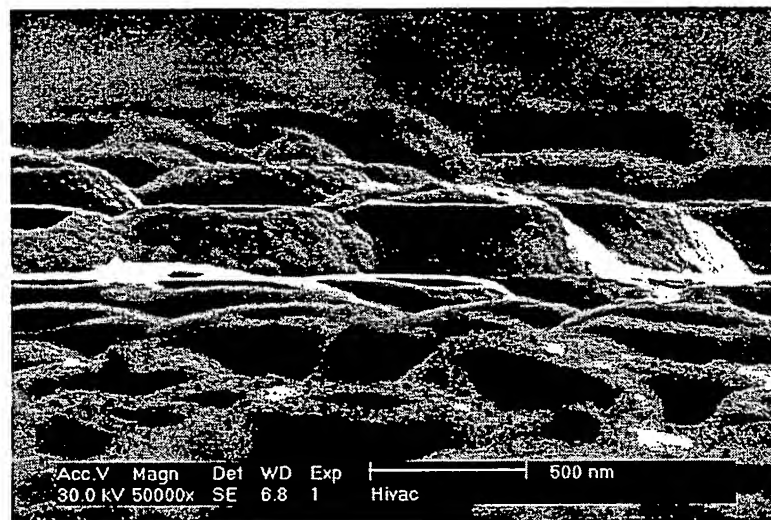

Alumoxane	polystyrene	flow	flux	permeability	surface area	pore volume
	(μm)	(mL/min)	(10^{-6}m/s)	(nm^2)	(m^2/g)	(mL/g)
Support	-	0.116	1.40	37.18	3.5	0.02
A-alumoxane	-	0.071	0.85	22.15	111.3	0.32
A-alumoxane	0.75	0.103	1.25	32.21	267.0	0.50
A-alumoxane	3.0	0.106	1.28	32.98	265.1	0.56
A-alumoxane	15	0.095	1.15	29.68	272.1	0.57
A-alumoxane	mixed	0.072	0.87	22.48	285.6	0.42
MEEA-alumoxane	0.75	0.102	1.23	31.77	218.52	0.53
MEEA-alumoxane	3.0	0.159	1.92	49.57	231.75	0.56
MEEA-alumoxane	15	0.159	1.92	49.66	333.50	0.81
MEEA-alumoxane	mixed	0.121	1.46	37.71	202.14	0.29

Fig. 20